


TESTING AND TAGGING

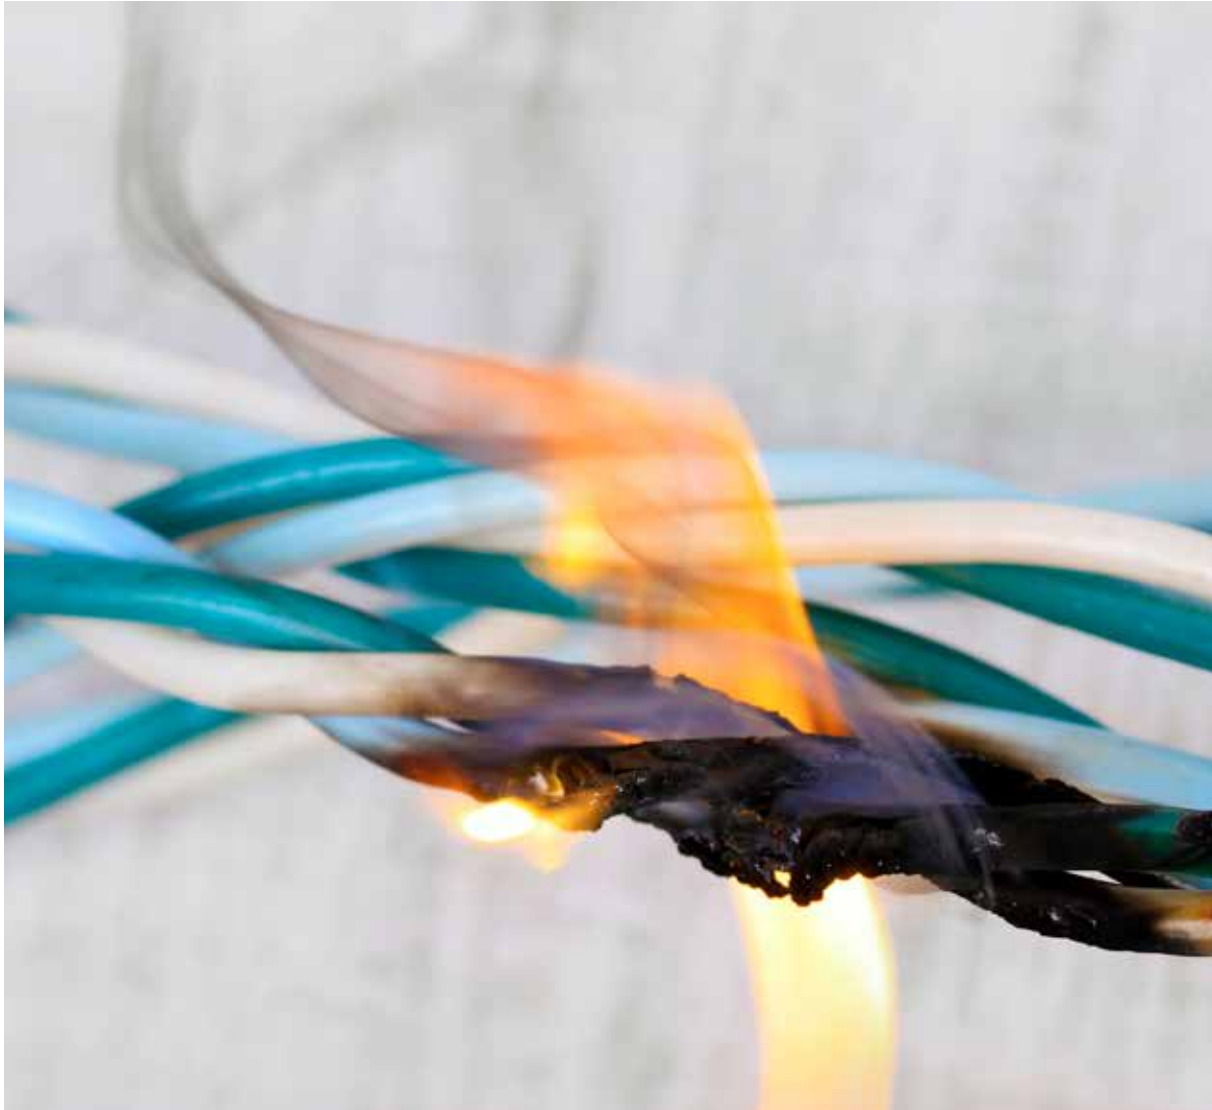

Recently a worker was injured when he came into contact with a damaged cord on a radio.

All electrical equipment on construction sites, including radios and battery chargers, are required to be electrically inspected, tested and tagged to the requirements of Australian/New Zealand Standard, AS/NZS 3760 in service safety inspection and testing of electrical equipment.

On construction site, all equipment will be inspected to the time frames specified in AS/NZS 3012 Electrical Installations – building and demolition sites.